



(11) **EP 3 308 356 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**08.04.2020 Bulletin 2020/15**

(21) Application number: **16807047.2**

(22) Date of filing: **09.06.2016**

(51) Int Cl.:  
**G06T 7/00 (2017.01)**

(86) International application number:  
**PCT/IN2016/050178**

(87) International publication number:  
**WO 2016/199171 (15.12.2016 Gazette 2016/50)**

(54) **SYSTEM AND METHOD FOR DETECTING A DISSIMILAR OBJECT IN UNDERCARRIAGE OF A VEHICLE**

SYSTEM UND VERFAHREN ZUR ERKENNUNG EINES UNGLEICHEN OBJEKTS IM FAHRGESTELL EINES FAHRZEUGS

SYSTÈME ET PROCÉDÉ POUR DÉTECTER UN OBJET DIFFÉRENT DANS UN CHÂSSIS D'UN VÉHICULE

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(30) Priority: **09.06.2015 IN 1719DE2015**

(43) Date of publication of application:  
**18.04.2018 Bulletin 2018/16**

(73) Proprietor: **Vehant Technologies Private Limited Utter Pradesh Noida 201301 (IN)**

(72) Inventors:  
• **PRABHU, Anoop G**  
**Utter Pradesh Noida 201301 (IN)**  
• **BARDEJA, Kapil**  
**Utter Pradesh Noida 201301 (IN)**

(74) Representative: **Norris, Timothy Sweyn Basck**  
**50 - 60 Station Road**  
**Cambridge CB1 2JH (GB)**

(56) References cited:  
**EP-A1- 1 482 329 WO-A2-2007/032025**  
**US-A1- 2004 199 785 US-B2- 7 349 007**  
**US-B2- 8 150 105**

- **Karel Kosnar ET AL: "Kerberos -3D undercarriage inspection system", , 31 December 2013 (2013-12-31), pages 1-5, XP055518448, Retrieved from the Internet: URL:<http://imr.ciirc.cvut.cz/uploads/Industry/kerberos.pdf> [retrieved on 2018-10-24]**
- **S. R. Sukumar ET AL: "Under Vehicle Inspection with 3d Imaging" In: "3D Imaging for Safety and Security", 1 January 2007 (2007-01-01), Springer Netherlands, Dordrecht, XP055518511, ISBN: 978-1-4020-6181-3 vol. 35, pages 249-278, DOI: 10.1007/978-1-4020-6182-0\_11, \* the whole document \***
- **Anonymous: "Libor Preucil (Total 4443 Papers Found)", , 30 August 2018 (2018-08-30), XP055518446, Retrieved from the Internet: URL:[https://webcache.googleusercontent.com/search?q=cache:C-mK03w7OJwJ:https://proportional.co/author/Libor-Preucil%3Fp%3D2+%cd=6&hl=en&ct=clnk&gl=de&client=firefox-b-a b](https://webcache.googleusercontent.com/search?q=cache:C-mK03w7OJwJ:https://proportional.co/author/Libor-Preucil%3Fp%3D2+%c d=6&hl=en&ct=clnk&gl=de&client=firefox-b-a b) [retrieved on 2018-10-24]**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 3 308 356 B1**

## Description

### BACKGROUND

#### Technical Field

[0001] The embodiments herein generally relate to vehicle scanning system, and, more particularly, to a system and method for detecting a dissimilar object in an undercarriage of a vehicle based on 3-dimensional image data of the undercarriage of the vehicle.

#### Description of the Related Art

[0002] In the current context, security threats to people and buildings abound. Vehicles can be used potentially to transport explosives by attaching the explosive to an undercarriage/underbody of the vehicle. The vehicle underbody inspection or under vehicle inspection are performed by different means with varying levels of efficiency using mirrors, systems which record and play-back the video from multiple CCTV video cameras, and systems that (a) captures the complete underside view in a multiple images by means of one or multiple linescan, and/or area scan cameras, and (b) combines the multiple images captured by the camera in an intelligent fashion to form composite image(s). Some of the composite image based systems automatically compare the image obtained for a particular vehicle with a reference image of the same type of the vehicle, and check for differences using image processing algorithms.

[0003] PCT publication WO 2007/032025 A2 discloses a method and a system for network based automatic inspection of vehicles which detects the location and time instants of the vehicle at predefined points. Images of the vehicle are captured and a composite image is formed automatically adjusting the intensity and contrast for improving the visual clarity of the processed image. These images are processed to detect model of the vehicle, and compared with pre-captured images stored in the database to identify differences.

[0004] The European patent application number EP 1 482 329 A1 discloses a system for detecting hidden objects under a vehicle. The system includes (a) a camera for taking an image of the undercarriage of the vehicle, (b) a memory for storing a reference image, and (c) a processor which compares the image to the reference image and outputting an alert when there are significant differences between the image and reference image.

[0005] One main aspect of all the existing digital or automated systems for underside inspection is capturing the two-dimensional images/data, including in some cases images from multiple views, for display or processing. However, the multiple images/views are two dimensional data which are being processed. Inspection using the same is inefficient, because these systems do not compute the 3D profiles of the vehicle to find the dissimilar object undercarriage of the vehicle with more accuracy.

[0006] PCT publication WO 2014/005804 A1 discloses a method for testing a vehicle underbody of a motor vehicle. The method involves steps of: (a) acquiring images of the vehicle underbody, (b) generating a three-dimensional depth image with the aid of the acquired images, and (c) testing the vehicle underbody generated three-dimensional depth image.

[0007] In another existing system, published in 3D Imaging for Safety and Security, pp. 249-278, 2007, eds A. Koschan et al., SAFER (Security Automation and Future Electromotive Robotics) was proposed by the Imaging, Robotics, and Intelligent Systems (IRIS) Laboratory at The University of Tennessee (UT). In this system, 3D scans are collected under the vehicle carriages. The scans require appropriate segmentation and representation algorithms to facilitate the vehicle inspection process.

[0008] The U.S patent number US 8,150,105 B2 discloses generation of a three-dimensional profile of an object, such as a vehicle, using image data corresponding to the object. The 3D profile can be captured using different acquisition means, including laser scanner, laser triangulation as the object passes an inspection location. The three-dimensional profile can be analyzed to identify any anomalies that are associated with the object.

[0009] In a published article (Karel Kosnar et al.; "Kerberos-3D undercarriage inspection system"), there is described an automated laser-based undercarriage vehicle inspection system. The system provides complete recovery of a full three-dimensional relief of a passing over vehicle at reasonable driving speed. Its capability incorporates automated comparison of the reconstructed undercarriage model to previous scans of the vehicle from a database and identifies any additional objects. The system employs laser range-finders. This unique solution allows to find and label objects even in the cases, these exhibit similar, or the same surface color and texture as the background they are attached to. The system solution applies principles based on two and three-dimensional shape reconstruction and registration methods, widely used in mobile robot localization and mapping.

[0010] In a United States patent document US 2004/0199785 A1 (Pederson; "Intelligent Observation and Identification Database System"), there is described an intelligent video/audio observation and identification database system which define a security zone or group of zones. The system may identify vehicles and individuals entering or exiting the zone through image recognition of the vehicle or individual as compared to pre-recorded information stored in a database. The system may alert security personnel as to warrants or other information discovered pertaining to the recognized vehicle or individual resulting from a database search. The system may compare images of a suspect vehicle, such as an undercarriage image, to standard vehicle images stored in the database and alert security personnel as to potential vehicle overloading or foreign objects detected, such

as potential bombs. The system may track individuals or vehicles within a zone or between zones. The system may further learn the standard times and locations of vehicles or individuals tracked by the system and alert security personnel upon deviation from standard activity.

**[0011]** In a United States patent document US 7,349,007 B2 (Millar; "Entry Control Point Device, System and Method"; assigned to Gatekeeper Inc.), there is described a device, system and method which can recognize a vehicle by its undercarriage image only. The system compares a new vehicle undercarriage image with those stored in a reference database to facilitate the automatic search of a vehicle's undercarriage. The system can compare the new undercarriage image to the same or similar undercarriage image previously entered in the reference database, highlighting any anomalies such as, for example, foreign objects, explosives, drugs, paraphernalia and other illegal and/or harmful substances and devices.

**[0012]** Even though these systems are capturing the images and 3D profiles of the vehicle underside by various means and arrangements for inspection purposes, they do not disclose a method of: (a) comparing the vehicle with the standard vehicle model to detect the dissimilar objects under the vehicle, and (b) finding the dissimilar objects from the 3D profiles when the vehicle is passed at different speeds.

**[0013]** Inspection of the vehicle profiles other than the underside of the vehicle such as top or sides of the vehicle are necessary for other applications (i.e. analyzing the vehicle, cross checking the vehicle) apart from the security. For example, damage inspection for insurance purposes, theft assessment, etc. are some applications where inspection of the vehicle overhead and sides are carried out.

**[0014]** Accordingly, there remains a need for a system and method to detect a dissimilar object in underside of a vehicle in efficient way.

## SUMMARY

**[0015]** In view of the foregoing, an embodiment herein provides an under vehicle scanning system for detecting a dissimilar object in a vehicle. The under vehicle scanning system includes (a) a scanner and acquisition module that is configured to capture one or more three dimensional (3D) images of an undercarriage of the vehicle at multiple instants when the vehicle crosses a structural unit with a slit, (b) an analysis and processing module that is configured to process the one or more 3D images to obtain one or more 3D profiles of the undercarriage of the vehicle, and (c) a display module configured to highlight the dissimilar object when the dissimilar object is detected in the undercarriage of the vehicle. The analysis and processing module further configured to: normalize variations in orientation of the one or more 3D profiles of the vehicle's undercarriage, generate a 3D signature of the vehicle based on the one or more normalized 3D

profiles of the vehicle's undercarriage, identify a model of the vehicle based on the 3D signature of the vehicle, and compare the one or more 3D profiles of the undercarriage of the vehicle with a standard profile of the undercarriage of a same model vehicle using the 3D signature to detect the dissimilar object characterized in that the analysis and processing module is configured to generate the 3D signature of the vehicle by : (a) initializing a point set for a line of the plurality of 3D profiles with a first point, (b) comparing depth of each point along the line with depths of a previous point and a next point to add a current point at a change or discontinuity in the monotonic nature of the depth of the vehicle, (c) continuing step (b) till an end of the line is reached, and adding a last point, (d) calculating a value of z, z representing the depth details of the vehicle, based on the line between the first point and the next point for each consecutive pair of points, (e) subtracting the calculated value of z from an actual value of z for all the points in the 3D profile line to obtain a difference value, and (f) adding the difference value to curvature for generating the 3D signature of the vehicle.

**[0016]** In one embodiment, the scanner and acquisition module includes an image capturing unit that is installed at a depth below a ground surface level to cover the entire width of the vehicle.

**[0017]** In another embodiment, the image capturing unit includes a three dimensional depth sensor to capture the one or more three dimensional (3D) images of the undercarriage of the vehicle.

**[0018]** In yet another embodiment, the display module provides an interactive visualization of the one or more 3D profiles of the vehicle, alongside with the standard profile of the vehicle, by zooming in to an area of interest in the one or more 3D profiles of the vehicle.

**[0019]** In yet another embodiment, when a specific region on the one or more 3D profiles of the undercarriage of the vehicle is selected, the display module provides a zoom option to enable a relative mode visualization to analyze the specific region on the one or more 3D profiles of the vehicle's undercarriage.

**[0020]** In one embodiment, the interactive visualization of the one or more 3D profiles of the vehicle is computed based on depth histogram.

**[0021]** In another aspect, a method of detecting a dissimilar object in a vehicle using a three dimensional (3D) under vehicle scanning system is provided. The method includes following steps of: (a) capturing one or more 3D images of an undercarriage of the vehicle when the vehicle crosses a structural unit with a slit of the 3D under vehicle scanning system, (b) processing the one or more 3D images to obtain one or more 3D profiles of the undercarriage of the vehicle, (c) normalizing variations in orientation of the one or more 3D profiles of the vehicle's undercarriage, (d) generating a 3D signature of the vehicle based on the one or more normalized 3D profiles of the vehicle's undercarriage, (e) identifying a model of the vehicle based on the 3D signature of the vehicle, (f)

comparing the one or more 3D profiles of the vehicle with a standard profile of the undercarriage of a same model vehicle using the 3D signature to detect a dissimilar object, (g) providing an interactive visualization of the one or more 3D profiles of the vehicle, alongside with the standard profile of the vehicle, and (h) highlighting the dissimilar object when the dissimilar object is detected in the undercarriage of the vehicle, characterized in that generating the 3D signature includes the following steps of: (a) initializing a point set for a line of the one or more 3D profiles with a first point, (b) comparing depth of each point along the line with depths of a previous point and a next point to add a current point at a change or discontinuity in the monotonic nature of the depth of the 3D profile line of the vehicle, (c) continuing the step (b), till an end of the line is reached, and add a last point, (d) calculating a value of  $z$ ,  $z$  representing the depth details of the vehicle, based on the line between the first point and the next point for each consecutive pair of points, (e) subtracting the calculated value of  $z$  from an actual value of  $z$  in the 3D profile line to obtain a difference value, and (f) adding difference value to curvature for generating the 3D signature of the vehicle.

[0022] In another embodiment, the steps (a) to (f) are performed for each of the lines of the one or more 3D profiles for generating the 3D signature of the vehicle.

[0023] These and other aspects of the embodiments herein will be better appreciated and understood when considered in conjunction with the following description and the accompanying drawings. It should be understood, however, that the following descriptions, while indicating preferred embodiments and numerous specific details thereof, are given by way of illustration and not of limitation. Many changes and modifications may be made within the scope of the embodiments herein without departing from the spirit thereof, and the embodiments herein include all such modifications.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0024] The embodiments herein will be better understood from the following detailed description with reference to the drawings, in which:

FIG. 1 illustrates a system view of an under vehicle scanning system that detects a dissimilar object in undercarriage of a vehicle using a three dimensional (3D) profile of the vehicle according to an embodiment herein;

FIG. 2 illustrates an exploded view of the under vehicle scanning system of FIG. 1 according to an embodiment herein;

FIGS. 3A-3C illustrate one or more 3D profile variations of the vehicle according to an embodiment herein;

FIG. 4A illustrates steps performed on any one of the lines of the 3D profiles/three dimensional (3D) point cloud representation of the vehicle in the process of generating the 3D signature according to an embodiment herein;

FIG. 4B illustrates a 3D profile of the vehicle with dissimilar objects according to an embodiment herein;

FIGS. 5A and 5B are flow diagrams illustrating a method of detecting a dissimilar object in an undercarriage of a vehicle using a under vehicle scanning system of FIG. 1 according to an embodiment herein;

FIG. 6 illustrates an exploded view of a receiver used in accordance with the embodiments herein; and

FIG. 7 illustrates a schematic diagram of a computer architecture used in accordance with the embodiments herein.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0025] The embodiments herein and the various features and advantageous details thereof are explained more fully with reference to the non-limiting embodiments that are illustrated in the accompanying drawings and detailed in the following description. Descriptions of well-known components and processing techniques are omitted so as to not unnecessarily obscure the embodiments herein. The examples used herein are intended merely to facilitate an understanding of ways in which the embodiments herein may be practiced and to further enable those of skill in the art to practice the embodiments herein. Accordingly, the examples should not be construed as limiting the scope of the embodiments herein.

[0026] Various embodiments of the methods and systems disclosed herein provide a under vehicle scanning system that includes a scanner and acquisition unit (SAU) and an analysis and processing unit (APU). The SAU includes an image capturing unit (i.e. a three dimensional depth sensor) that captures three dimensional images of the undercarriage of the vehicle when the vehicle crosses the under vehicle scanning system. The APU processes and analyzes the three dimensional images/profiles of the vehicle's undercarriage to detect a dissimilar object in the undercarriage of the vehicle. Referring now to the drawings, and more particularly to FIGS. 1 through 7, where similar reference characters denote corresponding features consistently throughout the figures, there are shown preferred embodiments.

[0027] FIG. 1 illustrates a system view of an under vehicle scanning system 100 that detects a dissimilar object in an undercarriage of a vehicle 102 using a three dimensional (3D) profile of the vehicle according to an embodiment herein. The under vehicle scanning system 100

includes a structural unit with a slit 104, an image capturing unit 106 (e.g. a three dimensional depth sensor), and an analysis and processing unit 108 (APU). The image capturing unit 106 may be included in a scanner and acquisition unit (SAU). The image capturing unit 106 captures three dimensional images/profiles of the undercarriage of the vehicle 102 when the vehicle 102 crosses the structural unit with the slit 104. The structural unit with the slit 104 may be placed on a top plate assembly of the under vehicle scanning system 100. In another embodiment, the image capturing unit 106 is installed at least one of (a) top side, (b) front side, (c) back side, (d) left side, (e) right side, and (f) bottom side of the vehicle 102 to capture three dimensional profiles of the corresponding vehicle portion, when the vehicle crosses the image capturing unit 106. The image capturing unit 106 may be a three dimensional (3D) depth sensor. The 3D depth sensor may be a Laser scanning sensor, a Triangulation based sensor, a Time-of-Flight camera, a Stereo 3D camera, a Structured Lighting based sensors, or any other form of sensor capable of providing a 3D depth profile of a viewing area. In one embodiment, the image capturing unit 106 is covered with a waterproof casing. In another embodiment, the image capturing unit 106 is communicatively connected to the analysis and processing unit 108. The APU 108 includes a receiver to receive the three dimensional images/profiles from the image capturing unit 106. In one embodiment, the image capturing unit 106 captures two dimensional images/profiles and displays the two dimensional images/profiles to improve visualization. In another embodiment, the image capturing unit 106 captures three dimensional images/profiles of all sides of the vehicle 102 when the vehicle 102 crosses the structural unit with the slit 104. The APU 108 generates a 3D signature of the vehicle 102 based on the three dimensional images/profiles of the undercarriage of the vehicle 102. The APU 108 process and analyzes the 3D signature of the vehicle 102 to detect a dissimilar object in the undercarriage of the vehicle 102.

**[0028]** FIG. 2 illustrates an exploded view 200 of the under vehicle scanning system 100 of FIG. 1 according to an embodiment herein. The exploded view 200 includes a scanner and acquisition module 202, an analysis and processing module 204, a display module 206 and a database 208. The scanner and acquisition module 202 captures depth details (i.e. 3D images/profiles) of the undercarriage of the vehicle 102 using the image capturing unit 106 (e.g., a three dimensional (3D) depth sensor) when the vehicle 102 crosses the structural unit with the slit 104. In one embodiment, the scanner and acquisition module 202 captures depth details of the undercarriage of the vehicle 102 irrespective of a way (i.e. speed patterns of the vehicle 102, and lateral shifts and orientation of the vehicle 102) in which the vehicle 102 driven over the image capturing unit 106. The scanner and acquisition module 202 is installed at a suitable depth below a ground surface level, such that the angle of view of the scanner and acquisition module 202 covers the

entire width of the vehicle 102. In one embodiment, the scanner and acquisition module 202 captures 3D images along the length of the vehicle 102 at multiple instants. In yet another embodiment, the scanner and acquisition module 202 includes sensors (e.g., an inductive loop, a piezo sensor, a magnetic sensors, or an ultrasound sensor) to detect an entry and exit of the vehicle 102 from the scanning area.

**[0029]** The analysis and processing module 204 combines the 3D images captured by the image capturing unit 106 across the passage of the entire vehicle 102 to produce a 3D profile of the vehicle undercarriage. In one embodiment, the 3D profile is represented as 3D point cloud data. The analysis and processing module 204 process the 3D profile (i.e. three dimensional point cloud representation) of the vehicle undercarriage, and generates a 3D signature of the vehicle 102. In one embodiment, the 3D signature includes depth variations of the 3D profile of the vehicle 102 that helps comparison of the 3D profile of the undercarriage of the vehicle 102 with a standard profile of the undercarriage of the vehicle 102.

**[0030]** The analysis and processing module 204 identifies a model of the vehicle 102 based on the 3D signature of the vehicle 102. The analysis and processing module 204 compares the 3D profiles of the vehicle 102 with the standard profile stored in the reference database to detect the dissimilar object. In one embodiment, when the dissimilar object is detected, the dissimilar object may be highlighted in the display module 206, or an alarm may be generated to alert the security personal. The display module 206 further provides a dynamic and an interactive visualization of the 3D profile of the vehicle 102, alongside with a standard profile of the vehicle 102. The analysis and processing module 204 may be connected to the scanner and acquisition sensor 202 module by a wired connection, or a wireless connection.

**[0031]** The display module 206 provides an option to visualize the 3D profile of the undercarriage of the vehicle 102. In one embodiment, the 3D profile of the undercarriage of the vehicle 102 is visualized in following modes: (a) an absolute mode, and (b) a relative mode. The visualization of the 3D profile of the undercarriage of the vehicle 102 is computed based on a depth histogram based technique. Initially, a depth histogram of entire range of the depths of the 3D profile of the undercarriage of the vehicle 102 is computed. A cumulative depth histogram of the 3D profile of the undercarriage of the vehicle 102 is then computed, and the depths are remapped in a linear scale based on frequency of points at each of different depth levels of the cumulative depth histogram. During visualization, the remapped 3D profile of the vehicle 102 is displayed in the display module 206.

**[0032]** The display module 206 provides interactive visualization by zooming into an area of interest in the 3D profile of the vehicle 102. When a user selects a specific region on the 3D profile of the undercarriage of the vehicle 102, the display module 206 provides a zoom button, a relative mode visualization to the user to ana-

lyze the specific region on the 3D profile of the undercarriage of the vehicle 102. When a specific region on the 3D profile of the undercarriage of the vehicle 102 is selected by the user, the depth histogram is recomputed for the selected region, and the remapped 3D profile is generated, and displayed in the display unit. Since, the selected region is smaller than the entire vehicle 102, the relative mode enhances the depth differences of the objects, and enables efficient visualization.

**[0033]** In one embodiment, the database 208 includes the following information for each model of the vehicle 102: (a) a name of the vehicle model, (b) a model ID (i.e. a system unique id used for indexing), (c) a 3D profile acquired for the vehicle, and (d) a 3D signature computed from the 3D profile of the vehicle.

**[0034]** In one embodiment, the under vehicle scanning system 100 includes camera modules to (a) capture a front/rear part of the vehicle 102, and (b) automatically recognize a number plate using OCR technology. The camera modules may capture photographs/images of a driver, and other occupants. In another embodiment, the under vehicle scanning system 100 may include more inspection consoles, either locally or on the network for remote monitoring/controlling.

**[0035]** In one embodiment, the 3D signature includes information only about the points in the 3D profile of the undercarriage of the vehicle 102 which are different from other points in the 3D profiles of the vehicle 102, thereby reduces memory and improves the computation process.

**[0036]** In yet another embodiment, the 3D signature of the undercarriage of the vehicle 102 is computed using a point cloud profile representation (i.e. a set of points in the X, Y, and Z geometric coordinate space). The 3D signature is a set of multi-dimensional data point representation of the depth variations of the 3D profile of the vehicle 102 across each row, and column. The computation process of 3D signature includes two steps. The first step is to normalize the point cloud for variations in orientation and lateral shifts of the 3D profile of the undercarriage of the vehicle 102. The objective of the first step is to orient the axes of the 3D profile of the undercarriage of the vehicle 102 based on a pre-defined standard, like x-axis along the width of the vehicle 102, y-axis along the length of the vehicle 102, and z-axis along the depth of the 3D profile of the vehicle 102. As per the configuration of the scanner and acquisition module 202, the z-axis of the point cloud or 3D profile of the undercarriage of the vehicle 102 represents the depth which is retained unchanged. But, the x-axis and the y-axis are affected by speed, rotation and the lateral shifts of the vehicle 102. Principal Component Analysis (PCA) is used to find the orientation of the vehicle 102, and is applied only in the x and y dimensions of the 3D point cloud. The origin of the 3D profile of the vehicle 102 is shifted to the centroid of the points, and the point cloud rotated to align the first principal component with the y-axis. The x-axis is taken perpendicular to the y-axis after realignment.

**[0037]** With reference to the FIG. 1 and FIG. 2, FIGS.

3A-3C illustrate one or more 3D profile variations of the vehicle 102 according to an embodiment herein. The FIGS. 3A- 3C show one or more 3D profiles variations of the vehicle 102 due to the driving pattern when the vehicle 102 passes the structural unit with the slit 104. Some of the drive patterns may be (i) the vehicle 102 is driven at low speed, (ii) the vehicle 102 is driven at high speed, (iii) the vehicle 102 is driven at varying speeds, (iv) the vehicle 102 is stopped for a short while over the structural unit with the slit 104, (v) the vehicle 102 is driven laterally off-centre, and (vi) the vehicle 102 is driven at an angle over the scanner and acquisition module 202. The 3D profile of the vehicle 102 that is illustrated in FIG. 3A includes one or more lines (i.e. 302, 304, 306, etc.), which represent cross sections at one or more points/regions of the vehicle 102.

**[0038]** With reference to FIG. 3A, FIG. 4 illustrates steps performed on any one of the lines (i.e. 302, 304, 306, etc.) of the 3D profiles/three dimensional (3D) point cloud representation of the vehicle 102 in the process of generating the 3D signature according to an embodiment herein. In the 3D point cloud, a line 302 is a cross section at one point of the vehicle 102 including all points with same value of "y" (i.e. considered as "Y" (along the vehicle 102 length) in the steps below). A line 402 illustrates a sampling resolution of the three dimensional depth sensor, resulting in multiple points along the line 302. For generating the 3D signature of the undercarriage of the vehicle 102, the points marked out in line 404 of the 3D profile of the vehicle 102 is retained for the line 402, when the current direction or a shape of the point cloud changes when moving along the point cloud line in the x direction.

**[0039]** A method of calculating the points where the point cloud changes includes the following steps: (a) initialize a point set for the line 402 with the first point P1 (as shown in line 404), (b) for each point along the line 402 compares the depth of the current point with the depths of the previous point and the next point, and add the current point, if any change or discontinuity in the monotonic nature of the depth of the points along the line 402 (i.e. direction of increase, decrease or constancy of the depth values), and (c) continue the step (b), till the end of the line 402 is reached, and add the last point Pn.

**[0040]** The point set for the line 402 includes the key points P1, P2, P3 ... Pn along the line 404, represented as (x1, Y, z1), (x2, Y, z2), (x3, Y, z3) .... (xm, Y, zm), (xn, Y, zn). The key points are added with curvature related information to capture all information on the line 402. The 3D signature includes multi-dimensional point set with values derived from P1, P2 ... Pn for each line (i.e. 402), and initialized to (x1, Y, z1, 0, 0), (x2, Y, z2, 0, 0) ... (xn, Y, zn, 0, 0). The last two dimensions (0s) include information related to curvature before and after the point respectively.

**[0041]** The method further includes the step of: (d) traverse the point set from P1 to Pn for each consecutive pair of points (i.e. P1:P2, P2:P3, ... Pm:Pn), (e) form the following equation of the line between the P1 (x1, Y, z1)

and the P2 (x2, Y, z2), for any given x (along the vehicle 102 width) between x1 and x2, z (depth component/depth details of the vehicle 102) can be calculated as,  $z = z1 + ((z2-z1)/(x2-x1)) * (x-x1)$ , (e) using the above equation, the information about curved regions is represented by curvature which is initialized to 0, (f) for all points between x1 and x2, calculate z from the equation, and subtract the calculated value of z from the actual value of z of the point (x, Y, z) in the point cloud, and add the difference to the curvature, (g) the curvature is zero if the points are strictly linear or flat, but the curvature is a positive value, if the curve is upward above the straight line between P1 and P2 or negative if the curve is below the line between P1 and P2 and finally update the 3D signature by distributing half of the curvature to the 5th component for P1 and 4th component for P2 to represent the curved region between P1 and P2, and (h) repeat steps (for example, for all points on the line).

**[0042]** The final result of the step is a point-set for each line that is reduced down from multiple hundreds or thousands points in the 3D profile. Each point is a multi-dimensional tuple of the form (i.e. X,  $Y_{eff}$ , Z, LC, RC), where LC (left-curvature) and RC (right-curvature) represents the non-linearity between the current point to the previous and next points respectively, X and Z are the x and z values directly from the 3D profile. The  $Y_{eff}$  for the first line is 1.

**[0043]** The point sets for each line (i.e. 302, 304, 306, etc.) of the 3D profile are computed, starting from the top. The computed point sets of the 3D profile of the vehicle 102 is compared line by line, each point at a time: P1<sub>line1</sub> of the first point set is compared with P1<sub>line2</sub> of the second point set, P2<sub>line1</sub> of the first point set is compared with P2<sub>line2</sub> of the second point set, and so on, where P1<sub>line1</sub> is (x1<sub>line1</sub>, y1<sub>line1</sub>, z1<sub>line1</sub>, LC1<sub>line1</sub>, RC1<sub>line1</sub>), and P1<sub>line2</sub> (x1<sub>line2</sub>, y1<sub>line2</sub>, z1<sub>line2</sub>, LC1<sub>line2</sub>, RC1<sub>line2</sub>) and so forth. If the current point set is different (i.e. except for the Y component) from the previous point set, increment  $Y_{eff}$  by 1, update the current point set with the new  $Y_{eff}$  and add the point set from the current line to the 3D signature set. This step above ensures that any linear/non-linear expansion in the length (along Y direction) of the 3D profile caused by varying speed patterns does not impact the 3D signature. The final 3D signature which includes the various point sets of the unique lines is a minimal representation of the unique features of the 3D profile of the vehicle 102.

**[0044]** FIG. 4B illustrates a 3D profile of the vehicle 102 with dissimilar objects 406A-B according to an embodiment herein. The APU 108 processes the 3D profile of the vehicle 102 to identify the dissimilar objects 406A-B using the 3D signature. When the 3D profiles are compared, the dissimilar objects 406A-B or an area encompassing the dissimilar objects 406A-B causes the 3D signature to be different from the reference 3D signature stored in the database 208 whereas the 3D signature of other areas would be similar to the corresponding parts of the reference 3D signature. In an embodiment, the

identified dissimilar areas are marked out for visualization in the display unit.

**[0045]** FIGS. 5A and 5B are flow diagrams illustrating a method of detecting a dissimilar object in an undercarriage of a vehicle using the under vehicle scanning system 100 of FIG. 1 according to an embodiment herein. At step 502, one or more 3D images of an undercarriage of the vehicle 102 is captured using the image capturing unit 106 when the vehicle 102 crosses the structural unit with a slit 104 on the top plate assembly of the 3D under vehicle scanning system 100. At step 504, the one or more 3D images are processed to obtain one or more 3D profiles of the undercarriage of the vehicle 102. At step 506, the variations in orientation of the one or more 3D profiles, or the three dimension point cloud of the vehicle's undercarriage are normalized based on principal component analysis (PCA). At step 508, a 3D signature of the undercarriage of the vehicle 102 is generated based on the one or more normalized 3D profiles of the vehicle's undercarriage. At step 510, a model of the vehicle is identified by comparing the 3D signature of vehicle 102 with the at least some of the 3D signatures stored in the reference database. At step 512, the one or more 3D profiles of the vehicle 102 are compared with a standard profile of the undercarriage of a same model vehicle using the 3D signature to detect a dissimilar object. At step 514, an interactive visualization of the 3D profiles of the vehicle 102, alongside with the standard profile of the vehicle is provided. At step 516, the dissimilar object is highlighted in the display module 206 when the dissimilar object is detected in the undercarriage of the vehicle 102. In one embodiment, the method of generating the 3D signature of vehicle 102 includes the following steps of: (a) initializing a point set for each line (i.e. 302, 304, 306, etc.) of the one or more 3D profiles with a first point, (b) comparing a depth of each point along the line with depths of a previous point and a next point to add a current point at a change or discontinuity in the monotonic nature of the depth of the vehicle 102 occurs, (c) continuing the step (b), till an end of the line is reached, and add a last point, (d) calculating a value of z (i.e. depth details of the vehicle) based on the line between the first point and the next point for each consecutive pair of points, (e) subtracting the calculated value of z from an actual value of z of the first point in the point cloud to obtain a difference value, and (f) adding difference value to curvature for updating the 3D signature of the vehicle 102.

**[0046]** FIG. 6 illustrates exploded view of a receiver having a memory 602 having a computer set of instructions, a bus 604, a display 606, a speaker 608, and a processor 610 capable of processing a set of instructions to perform any one or more of the methodologies herein, according to an embodiment herein. The processor 610 may also enable digital content to be consumed in the form of video for output via one or more displays 606 or audio for output via speaker and/or earphones 608. The processor 610 may also carry out the methods described

herein and in accordance with the embodiments herein. Digital content may also be stored in the memory 602 for future processing or consumption. The memory 602 may also store program specific information and/or service information (PSI/SI), including information about digital content (e.g., the detected information bits) available in the future or stored from the past.

**[0047]** A user of the receiver may view this stored information on display 606 and select an item of for viewing, listening, or other uses via input, which may take the form of keypad, scroll, or other input device(s) or combinations thereof. When digital content is selected, the processor 610 may pass information. The content and PSI/SI may be passed among functions within the receiver using bus 604.

**[0048]** The embodiments herein can take the form of an entirely hardware embodiment, an entirely software embodiment or an embodiment including both hardware and software elements. The embodiments that are implemented in software include but are not limited to, firmware, resident software, microcode, etc.

**[0049]** A representative hardware environment for practicing the embodiments herein is depicted in FIG. 7. This schematic drawing illustrates a hardware configuration of an information handling/computer system in accordance with the embodiments herein. The system comprises at least one processor or central processing unit (CPU) 10. The CPUs 10 are interconnected via system bus 12 to various devices such as a random access memory (RAM) 14, read-only memory (ROM) 16, and an input/output (I/O) adapter 18. The I/O adapter 18 can connect to peripheral devices, such as disk units 11 and tape drives 13, or other program storage devices that are readable by the system. The system can read the inventive instructions on the program storage devices and follow these instructions to execute the methodology of the embodiments herein.

**[0050]** The system further includes a user interface adapter 19 that connects a keyboard 15, mouse 17, speaker 24, microphone 22, and/or other user interface devices such as a touch screen device (not shown) to the bus 12 to gather user input. Additionally, a communication adapter 20 connects the bus 12 to a data processing network 25, and a display adapter 21 connects the bus 12 to a display device 23 which may be embodied as an output device such as a monitor, printer, or transmitter, for example.

**[0051]** The under vehicle scanning system 100 maintains the 3D signature database of all the standard models of vehicles for model identification and object/difference detection purposes. The under vehicle scanning system 100 may identify a vehicle by a license plate number, or Radio Frequency Identification (RFID). In such case, the current 3D profile is compared against a reference 3D profile of the same vehicle obtained from a database of 3D profiles identified by the license plate number or RFID information.

## Claims

1. An under vehicle scanning system (100) for detecting a dissimilar object in a vehicle (102), wherein the system comprises:

- a scanner and acquisition module (202) configured to capture a plurality of three dimensional, 3D, images of an undercarriage of the vehicle (102) at multiple instants when the vehicle (102) crosses a structural unit with a slit;

- an analysis and processing module (204) configured to process the plurality of 3D images to obtain a plurality of 3D profiles of the undercarriage of the vehicle (102), wherein the analysis and processing module (204) is further configured to:

- normalize variations in orientation of the plurality of 3D profiles of the vehicle's undercarriage;

- generate a 3D signature of the vehicle (102) based on the plurality of normalized 3D profiles of the vehicle's undercarriage;

- identify a model of the vehicle (102) based on the 3D signature of the vehicle (102); and

- compare the plurality of 3D profiles of the undercarriage of the vehicle (102) with a standard profile of the undercarriage of a same model vehicle using the 3D signature to detect the dissimilar object; and

- a display module (206) configured to highlight the dissimilar object when the dissimilar object is detected in the undercarriage of the vehicle (102),

### characterized in that

the analysis and processing module (204) is further configured to generate the 3D signature of the vehicle by:

(a) initializing a point set for a line of the plurality of 3D profiles with a first point;

(b) comparing depth of each point along the line with depths of a previous point and a next point to add a current point at a change or discontinuity in the monotonic nature of the depth of the vehicle (102);

(c) continuing step (b) till an end of the line is reached, and adding a last point;

(d) calculating a value of, z representing the depth details of the vehicle, based on the line between the first point and the next point for each consecutive pair of points;

(e) subtracting the calculated value of z from an actual value of z for all the points in the 3D profile line to obtain a difference value; and



- (f) adding the difference value to curvature for generating the 3D signature of the vehicle (102).
2. A system (100) as claimed in claim 1, **characterized in that** the scanner and acquisition module (202) comprises an image capturing unit that is installed at a depth below a ground surface level to cover the entire width of the vehicle (102). 5
3. A system (100) as claimed in claim 2, **characterized in that** the image capturing unit comprises a three dimensional depth sensor to capture the plurality of 3D images of the undercarriage of the vehicle (102). 10
4. A system (100) as claimed in claim 1, **characterized in that** the display module (206) provides an interactive visualization of the plurality of 3D profiles of the vehicle (102), alongside with the standard profile of the vehicle (102), by zooming in to an area of interest in the plurality of 3D profiles of the vehicle. 15 20
5. A system (100) as claimed in claim 1, **characterized in that** when a specific region on the plurality of 3D profiles of the undercarriage of the vehicle (102) is selected, the display module (206) provides a zoom option to enable a relative mode visualization to analyze the specific region on the plurality of 3D profiles of the vehicle's undercarriage. 25
6. A system (100) as claimed in claim 4, **characterized in that** the interactive visualization of the plurality of 3D profiles of the vehicle is computed based on depth histogram. 30
7. A method of detecting a dissimilar object in a vehicle using a 3D under vehicle scanning system (100), wherein the method comprises: 35
- capturing a plurality of 3D images of an undercarriage of the vehicle when the vehicle (102) crosses a structural unit with a slit of the 3D under vehicle scanning system; 40
  - processing the plurality of 3D images to obtain a plurality of 3D profiles of the undercarriage of the vehicle (102); 45
  - normalizing variations in orientation of the plurality of 3D profiles of the vehicle's undercarriage;
  - generating a 3D signature of the vehicle based on the plurality of normalized 3D profiles of the vehicle's undercarriage; 50
  - identifying a model of the vehicle based on the 3D signature of the vehicle (102);
  - comparing the plurality of 3D profiles of the vehicle (102) with a standard profile of the undercarriage of a same model vehicle using the 3D signature to detect a dissimilar object; 55
  - providing an interactive visualization of the plu-

ality of 3D profiles of the vehicle, alongside with the standard profile of the vehicle; and  
 - highlighting the dissimilar object when the dissimilar object is detected in the undercarriage of the vehicle (102),

#### **characterized in that**

generating the 3D signature comprises steps of:

- (a) initializing a point set for a line of the plurality of 3D profiles with a first point;
- (b) comparing a depth of each point along the line with depths of a previous point and a next point to add a current point at a change or discontinuity in the monotonic nature of the depth of the vehicle (102);
- (c) continuing the step (b), until an end of the line is reached, and add a last point;
- (d) calculating a value of z, z representing the depth details of the vehicle, based on the line between the first point and the next point for each consecutive pair of points;
- (e) subtracting the calculated value of z from an actual value of z for all the points in the 3D profile line to obtain a difference value; and
- (f) adding a difference value to curvature for generating the 3D signature of the vehicle (102).

8. A method as claimed in claim 7, **characterized in that** the steps (a) to (f) are performed for each of the lines of the plurality of 3D profiles for generating the 3D signature of the vehicle (102).

#### **Patentansprüche**

1. Fahrzeugunterboden-Abtastsystem (100) zum Erkennen eines ungleichen Objekts in einem Fahrzeug (102), wobei das System Folgendes umfasst:
- ein Abtast- und Erfassungsmodul (202), das dazu ausgestaltet ist, eine Vielzahl von dreidimensionalen, 3D, Bildern eines Fahrgestells des Fahrzeugs (102) zu mehreren Zeitpunkten aufzunehmen, wenn das Fahrzeug (102) eine Struktureinheit mit einem Schlitz überquert;
  - ein Analyse- und Verarbeitungsmodul (204), das dazu ausgestaltet ist, die Vielzahl von 3D-Bildern zu verarbeiten, um eine Vielzahl von 3D-Profilen des Fahrgestells des Fahrzeugs (102) zu erhalten, wobei das Analyse- und Verarbeitungsmodul (204) ferner dazu ausgestaltet ist,
    - Variationen bei der Ausrichtung der Vielzahl von 3D-Profilen des Fahrzeugfahrgestells zu normalisieren;
    - eine 3D-Signatur des Fahrzeugs (102) basierend auf der Vielzahl von normalisierten

3D-Profilen des Fahrzeugfahrgestells zu erzeugen;

- ein Modell des Fahrzeugs (102) basierend auf der 3D-Signatur des Fahrzeugs (102) identifizieren; und

- die Vielzahl von 3D-Profilen des Fahrgestells des Fahrzeugs (102) mit einem Standardprofil des Fahrgestells eines Fahrzeugs desselben Modells unter Verwendung der 3D-Signatur zu vergleichen, um das ungleiche Objekt zu erkennen; und

- ein Anzeigemodul (206), das dazu ausgestaltet ist, das ungleiche Objekt hervorzuheben, wenn das ungleiche Objekt in dem Fahrgestell des Fahrzeugs (102) erkannt wurde,

**dadurch gekennzeichnet, dass**

das Analyse- und Verarbeitungsmodul (204) ferner dazu ausgestaltet ist, die 3D-Signatur des Fahrzeugs durch Folgendes zu erzeugen:

(a) Einrichten einer Punktmenge für eine Linie der Vielzahl von 3D-Profilen mit einem ersten Punkt;

(b) Vergleichen einer Tiefe jedes Punkts entlang der Linie mit der Tiefe eines vorherigen Punkts und eines nachfolgenden Punkts, um einen aktuellen Punkt an einer Veränderung oder Unterbrechung in der gleichförmigen Beschaffenheit der Tiefe des Fahrzeugs (102) hinzuzufügen;

(c) Fortsetzen von Schritt (b), bis ein Ende der Linie erreicht wird, und Hinzufügen eines letzten Punkts;

(d) Berechnen eines Werts für z, wobei z die Tiefendetails des Fahrzeugs darstellt, basierend auf der Linie zwischen dem ersten Punkt und dem nachfolgenden Punkt für jedes aufeinanderfolgende Paar von Punkten;

(e) Subtrahieren des berechneten Werts für z von einem Istwert für z für alle Punkte in der 3D-Profil-Linie, um einen Differenzwert zu erhalten; und

(f) Hinzufügen des Differenzwerts zu einer Krümmung, um die 3D-Signatur des Fahrzeugs (102) zu erzeugen.

2. System (100) nach Anspruch 1, **dadurch gekennzeichnet, dass** das Abtast- und Erfassungsmodul (202) eine Bildaufnahmeeinheit umfasst, die in einer Tiefe unterhalb einer Bodenoberflächenebene installiert ist, um die gesamte Breite des Fahrzeugs (102) abzudecken.

3. System (100) nach Anspruch 2, **dadurch gekennzeichnet, dass** die Bildaufnahmeeinheit einen dreidimensionalen Tiefensensor umfasst, um die Vielzahl von 3D-Bildern des Fahrgestells des Fahrzeugs

(102) aufzunehmen.

4. System (100) nach Anspruch 1, **dadurch gekennzeichnet, dass** das Anzeigemodul (206) eine interaktive Darstellung der Vielzahl von 3D-Profilen des Fahrzeugs (102) bereitstellt, zusammen mit dem Standardprofil des Fahrzeugs (102), durch Heranzoomen in einen Interessensbereich in der Vielzahl von 3D-Profilen des Fahrzeugs.

5. System (100) nach Anspruch 1, **dadurch gekennzeichnet, dass**, wenn eine spezifische Region in der Vielzahl von 3D-Profilen des Fahrgestells des Fahrzeugs (102) ausgewählt wird, das Anzeigemodul (206) eine Zoom-Option bereitstellt, um eine Relativmodus-Darstellung zu ermöglichen, um die spezifische Region in der Vielzahl von 3D-Profilen des Fahrzeugfahrgestells zu analysieren.

6. System (100) nach Anspruch 4, **dadurch gekennzeichnet, dass** die interaktive Darstellung der Vielzahl von 3D-Profilen des Fahrzeugs basierend auf einem Tiefenhistogramm berechnet wird.

7. Verfahren zum Erkennen eines ungleichen Objekts in einem Fahrzeug unter Verwendung eines 3D-Fahrzeugunterboden-Abtastsystems (100), wobei das Verfahren Folgendes umfasst:

- Aufnehmen einer Vielzahl von 3D-Bildern eines Fahrgestells des Fahrzeugs, wenn das Fahrzeug (102) eine Struktureinheit mit einem Schlitz des 3D-Fahrzeugunterboden-Abtastsystems überquert;

- Verarbeiten der Vielzahl von 3D-Bildern, um eine Vielzahl von 3D-Profilen des Fahrgestells des Fahrzeugs (102) zu erhalten;

- Normalisieren von Variationen bei der Ausrichtung der Vielzahl von 3D-Profilen des Fahrzeugfahrgestells;

- Erzeugen einer 3D-Signatur des Fahrzeugs basierend auf der Vielzahl von normalisierten 3D-Profilen des Fahrzeugfahrgestells;

- Identifizieren eines Modells des Fahrzeugs basierend auf der 3D-Signatur des Fahrzeugs (102);

- Vergleichen der Vielzahl von 3D-Profilen des Fahrzeugs (102) mit einem Standardprofil des Fahrgestells eines Fahrzeugs desselben Modells, unter Verwendung der 3D-Signatur, um ein ungleiches Objekt zu erkennen;

- Bereitstellen einer interaktiven Darstellung der Vielzahl von 3D-Profilen des Fahrzeugs zusammen mit dem Standardprofil des Fahrzeugs; und  
- Hervorheben des ungleichen Objekts, wenn das ungleiche Objekt in dem Fahrgestell des Fahrzeugs (102) erkannt wird,

**dadurch gekennzeichnet, dass**

das Erzeugen der 3D-Signatur die folgenden Schritte umfasst:

- (a) Einrichten einer Punktmenge für eine Linie der Vielzahl von 3D-Profilen mit einem ersten Punkt; 5
- (b) Vergleichen einer Tiefe jedes Punkts entlang der Linie mit der Tiefe eines vorherigen Punkts und eines nachfolgenden Punkts, um einen aktuellen Punkt an einer Veränderung oder Unterbrechung in der gleichförmigen Beschaffenheit der Tiefe des Fahrzeugs (102) hinzuzufügen; 10
- (c) Fortsetzen von Schritt (b), bis ein Ende der Linie erreicht wird, und Hinzufügen eines letzten Punkts; 15
- (d) Berechnen eines Werts für z, wobei z die Tiefendetails des Fahrzeugs darstellt, basierend auf der Linie zwischen dem ersten Punkt und dem nachfolgenden Punkt für jedes aufeinanderfolgende Paar von Punkten; 20
- (e) Subtrahieren des berechneten Werts für z von einem Istwert für z für alle Punkte in der 3D-Profil-Linie, um einen Differenzwert zu erhalten; und 25
- (f) Hinzufügen eines Differenzwerts zu einer Krümmung, um die 3D-Signatur des Fahrzeugs (102) zu erzeugen.
8. Verfahren nach Anspruch 7, **dadurch gekennzeichnet, dass** die Schritte (a) bis (f) für jede der Linien in der Vielzahl von 3D-Profilen zum Erzeugen der 3D-Signatur des Fahrzeugs (102) durchgeführt werden. 30

**Revendications**

1. Système (100) de balayage sous véhicule pour la détection d'un objet différent dans un véhicule (102), le système comprenant : 40
- un module de balayage et d'acquisition (202) configuré pour capter une pluralité d'images tridimensionnelles, 3D, d'un châssis du véhicule (102) à plusieurs instants lorsque le véhicule (102) passe par une unité structurale munie d'une fente ; 45
  - un module d'analyse et de traitement (204) configuré pour traiter la pluralité d'images 3D dans le but d'obtenir une pluralité de profils 3D du châssis du véhicule (102), le module d'analyse et de traitement (204) étant en outre configuré pour : 50
- normaliser les variations d'orientation de la pluralité de profils 3D du châssis du véhicule ; 55
2. Système (100) selon la revendication 1, **caractérisé en ce que** le module de balayage et d'acquisition (202) comprend une unité de capture d'image qui est installée à une profondeur en dessous d'un niveau de surface au sol pour couvrir la totalité de la largeur du véhicule (102).
3. Système (100) selon la revendication 2, **caractérisé en ce que** l'unité de capture d'image comprend un capteur de profondeur tridimensionnel pour capturer la pluralité d'images 3D du châssis du véhicule (102).
4. Système (100) selon la revendication 1, **caractérisé en ce que** le module d'affichage (206) fournit une

- générer une signature 3D du véhicule (102) sur la base de la pluralité de profils 3D normalisés du châssis du véhicule ;  
 - identifier un modèle du véhicule (102) sur la base de la signature 3D du véhicule (102) ; et

- comparer la pluralité de profils 3D du châssis du véhicule (102) à un profil étalon du châssis d'un véhicule du même modèle par utilisation de la signature 3D pour détecter l'objet différent ; et

- un module d'affichage (206) configuré pour mettre en évidence l'objet différent lorsque l'objet différent est détecté dans le châssis du véhicule (102),

**caractérisé en ce que**

le module d'analyse et de traitement (204) est en outre configuré pour générer la signature 3D du véhicule par :

(a) initialisation d'un ensemble de points pour une ligne de la pluralité de profils 3D avec un premier point ;

(b) comparaison de la profondeur de chaque point le long de la ligne à la profondeur d'un point précédent et d'un point suivant, pour ajouter un point courant au niveau d'un changement ou d'une discontinuité de la nature monotone de la profondeur du véhicule (102) ;

(c) poursuite de l'étape (b) jusqu'à atteindre une fin de la ligne, et ajout d'un dernier point ;

(d) calcul d'une valeur de z, z représentant les détails de profondeur du véhicule, sur la base de la ligne entre le premier point et le point suivant, pour chaque paire consécutive de points ;  
 (e) soustraction de la valeur calculée de z d'une valeur effective de z pour tous les points de la ligne du profil 3D pour obtenir une valeur de différence ; et

(f) ajout de la valeur de différence à la courbure pour générer la signature 3D du véhicule (102).

visualisation interactive de la pluralité de profils 3D du véhicule (102), ainsi que le profil étalon du véhicule (102), en zoomant dans une zone d'intérêt de la pluralité de profils 3D du véhicule.

5. Système (100) selon la revendication 1, **caractérisé en ce que**, lorsque une région spécifique, sur la pluralité de profils 3D du châssis du véhicule (102), est sélectionnée, le module d'affichage (202) fournit une option de zoom pour activer un mode de visualisation relatif afin d'analyser la région spécifique de la pluralité de profils 3D du châssis du véhicule.

6. Système (100) selon la revendication 4, **caractérisé en ce que** la visualisation interactive de la pluralité de profils 3D du véhicule est calculée sur la base d'un histogramme de profondeurs.

7. Procédé de détection d'un objet différent dans un véhicule par utilisation d'un système (100) de balayage sous véhicule 3D, le procédé comprenant :

- la capture d'une pluralité d'images 3D d'un châssis du véhicule quand le véhicule (102) passe sur une unité structurale munie d'une fente du système de balayage sous véhicule 3D ;

- le traitement de la pluralité d'images 3D pour obtenir une pluralité de profils 3D du châssis du véhicule (102) ;

- la normalisation de variations d'orientation de la pluralité de profils 3D du châssis du véhicule ;

- la génération d'une signature 3D du véhicule sur la base de la pluralité de profils 3D normalisés du châssis du véhicule ;

- l'identification d'un modèle du véhicule sur la base de la signature 3D du véhicule (102) ;

- la comparaison de la pluralité de profils 3D du véhicule (102) à un profil étalon du châssis d'un véhicule du même modèle par utilisation de la signature 3D pour détecter un objet différent ;

- la fourniture d'une visualisation interactive de la pluralité de profils 3D du véhicule, en même temps que du profil étalon du véhicule ; et

- la mise en évidence de l'objet différent lorsque l'objet différent est détecté dans le châssis du véhicule (102),

#### **caractérisé en ce que**

la génération de la signature 3D comprend les étapes de :

(a) initialisation d'un ensemble de points pour une ligne de la pluralité de profils 3D avec un premier point ;

(b) comparaison de la profondeur de chaque point le long de la ligne à la profondeur d'un point précédent et d'un point suivant, pour ajouter un point courant au niveau d'un changement ou

d'une discontinuité de la nature monotone de la profondeur du véhicule (102) ;

(c) poursuite de l'étape (b) jusqu'à atteindre une fin de la ligne, et ajout d'un dernier point ;

(d) calcul d'une valeur de z, z représentant les détails de profondeur du véhicule, sur la base de la ligne entre le premier point et le point suivant, pour chaque paire consécutive de points ;

(e) soustraction de la valeur calculée de z d'une valeur effective de z pour tous les points de la ligne du profil 3D pour obtenir une valeur de différence ; et

(f) ajout de la valeur de différence à la courbure pour générer la signature 3D du véhicule (102).

8. Procédé selon la revendication 7, **caractérisé en ce que** les étapes (a) à (f) sont exécutées pour chacune des lignes de la pluralité de profils 3D pour générer la signature 3D du véhicule (102).

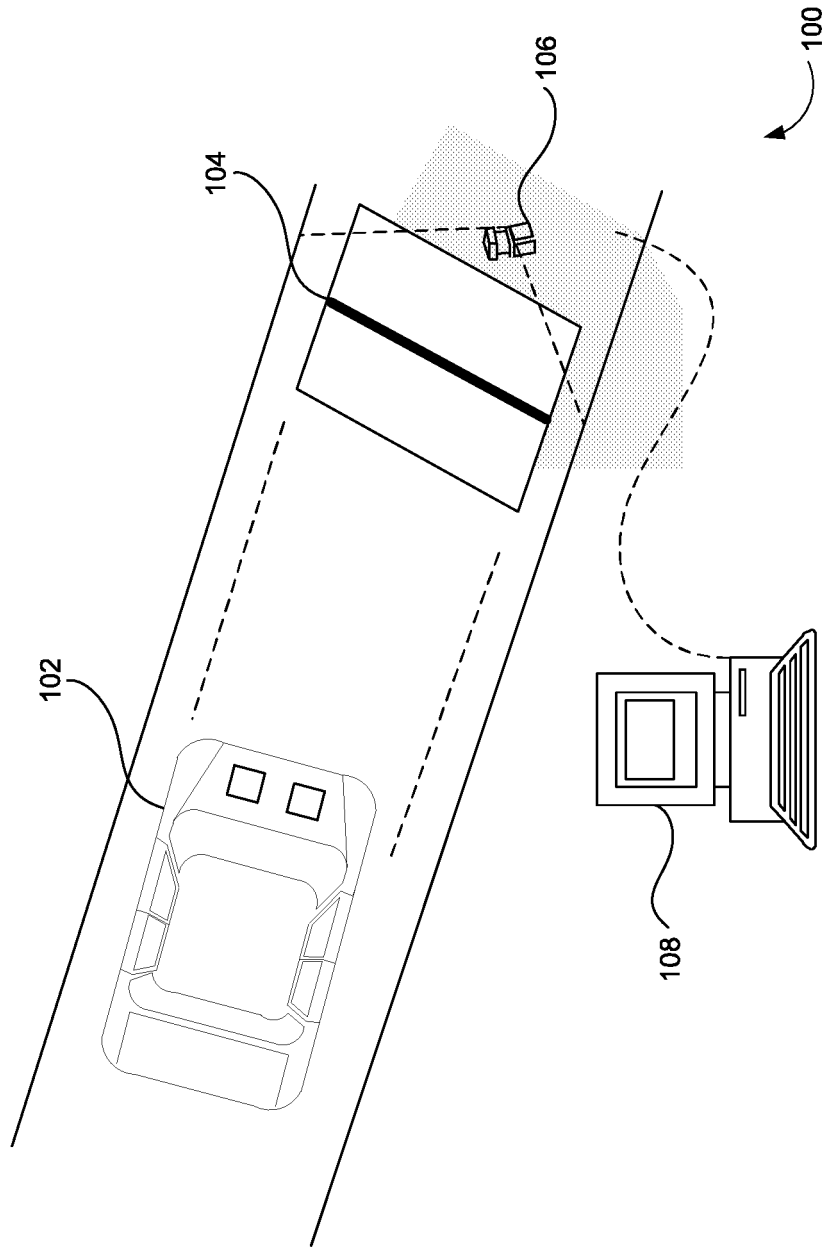


FIG. 1

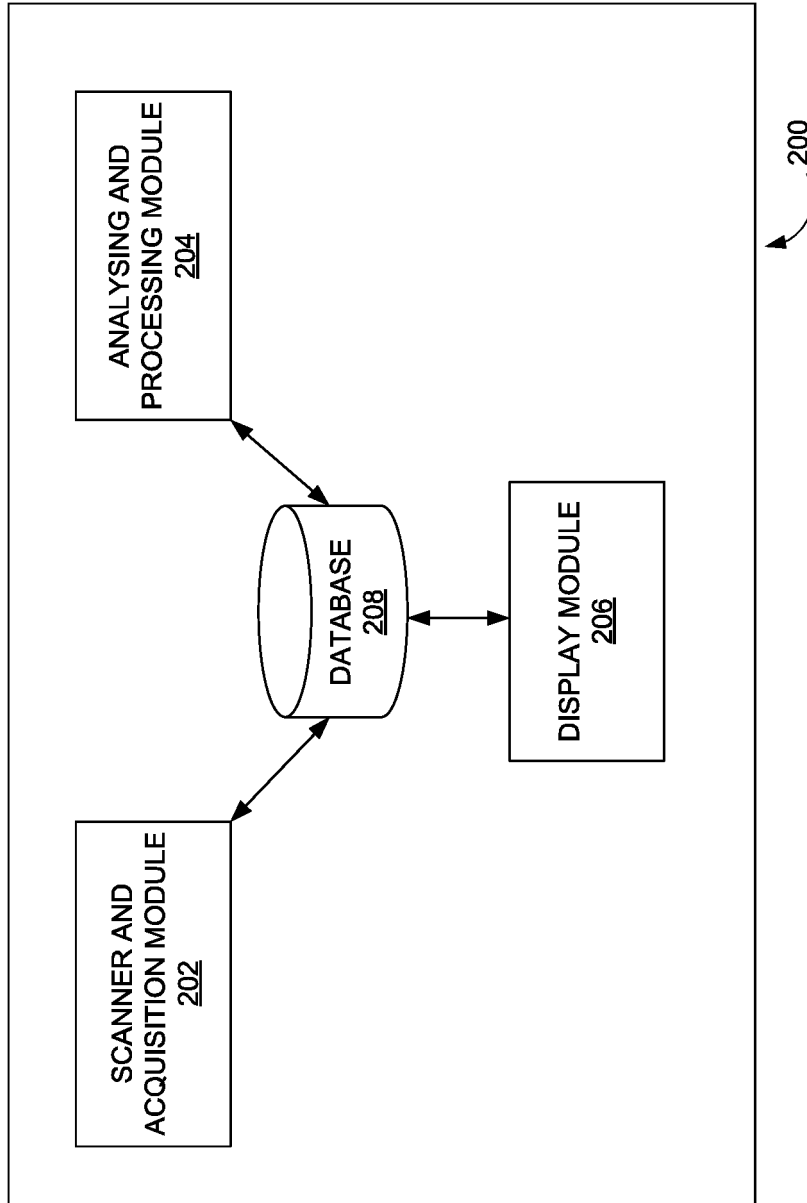


FIG. 2

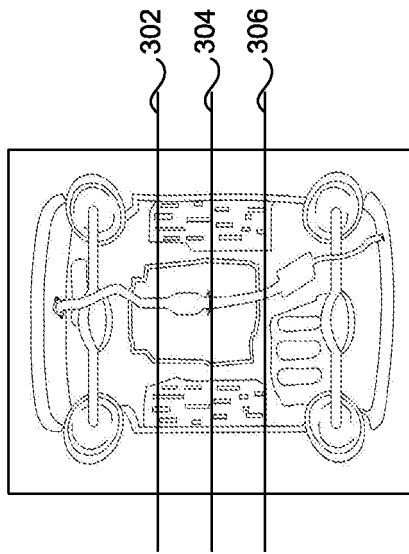


FIG. 3A

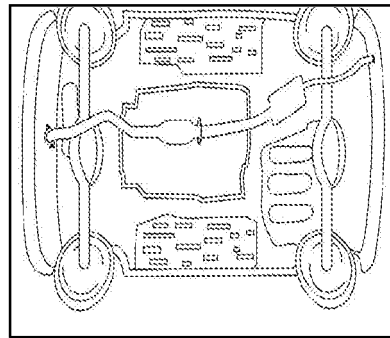


FIG. 3B

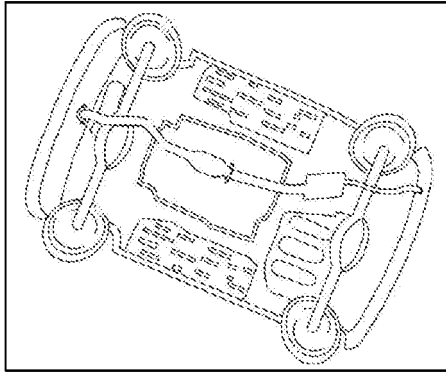


FIG. 3C

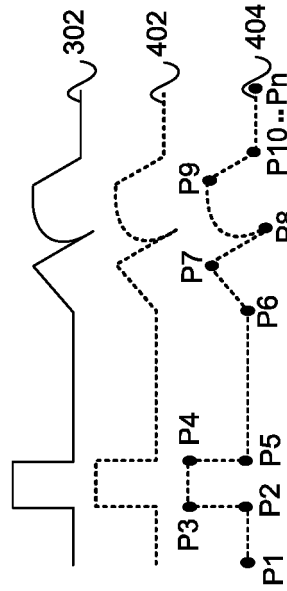


FIG. 4A

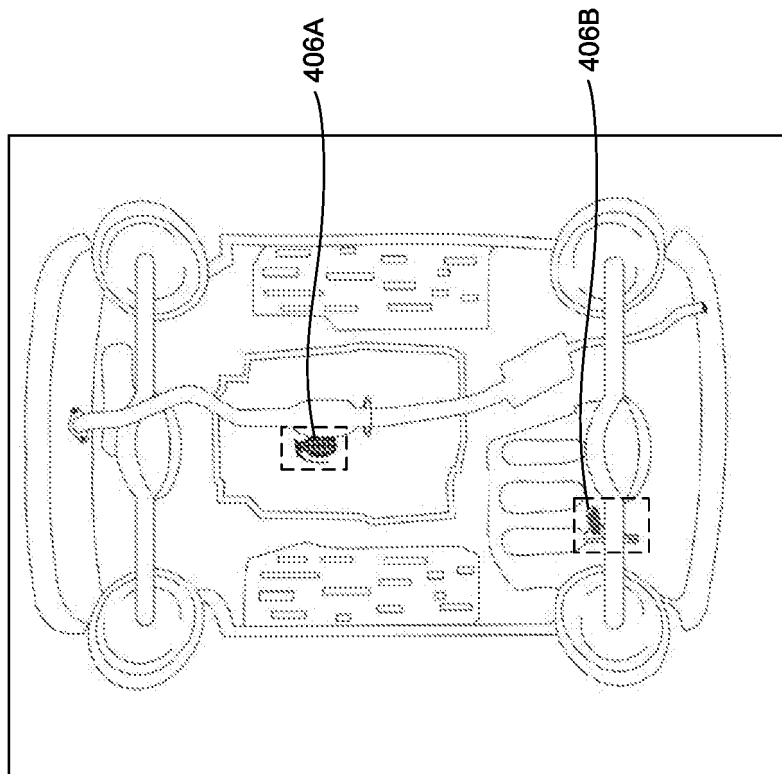


FIG. 4B



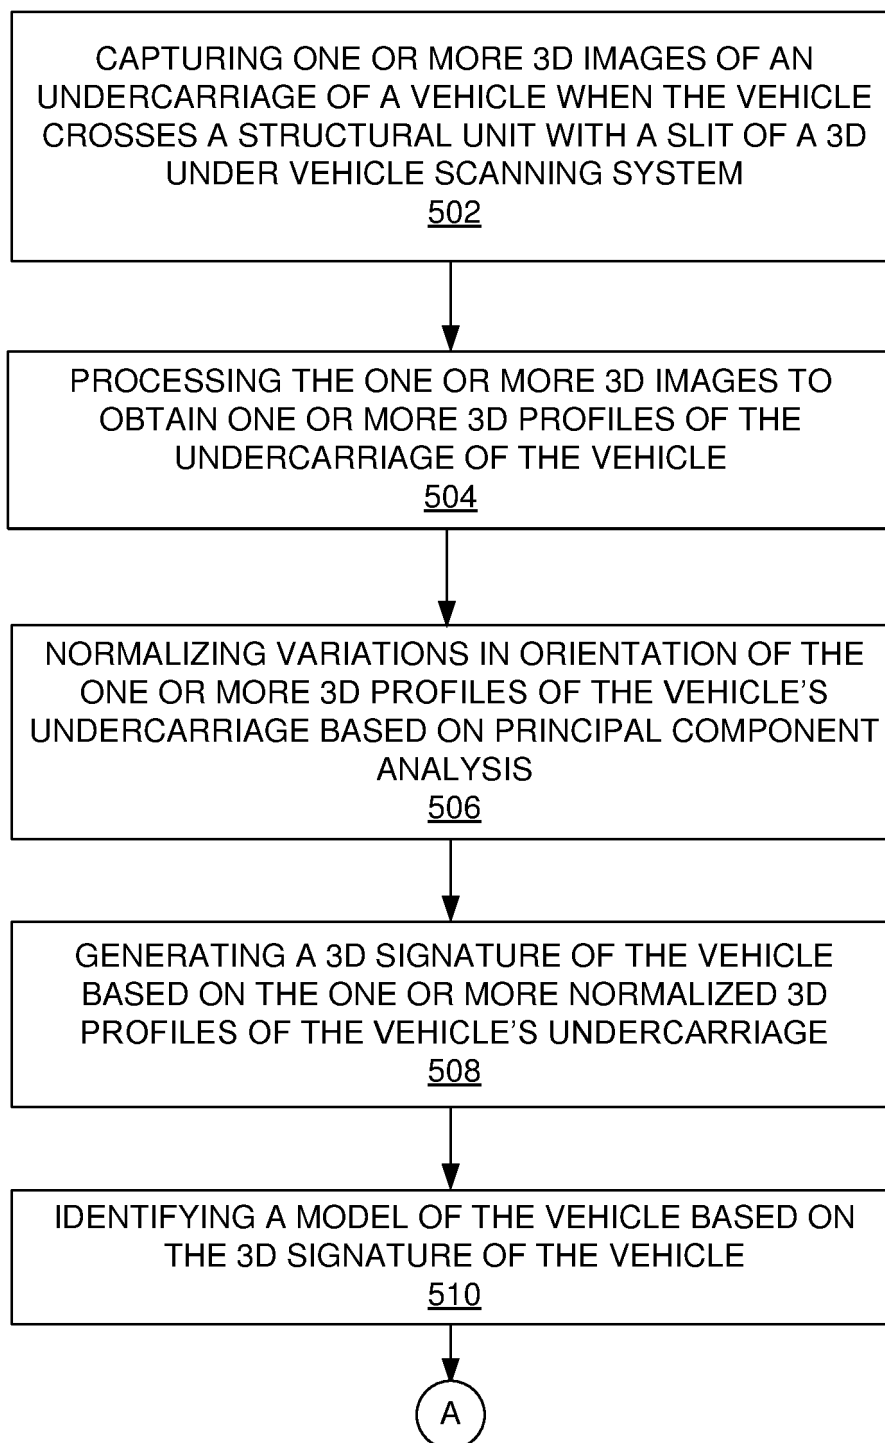
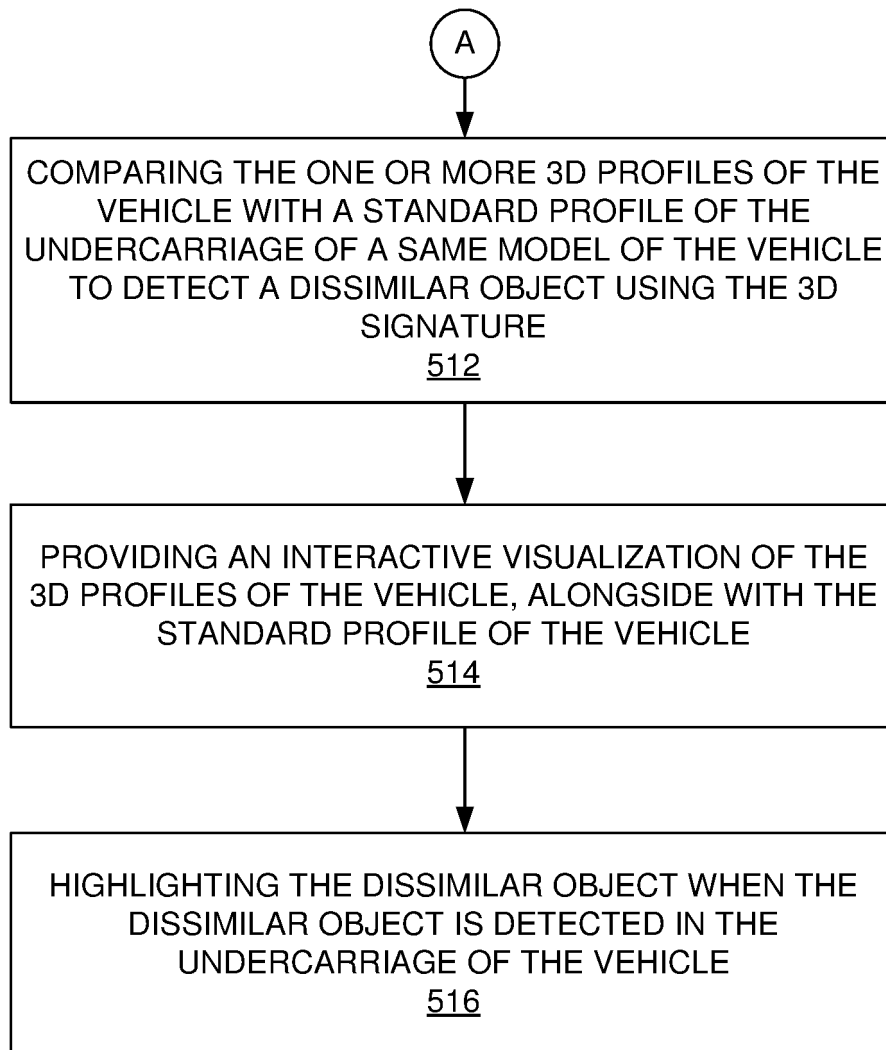
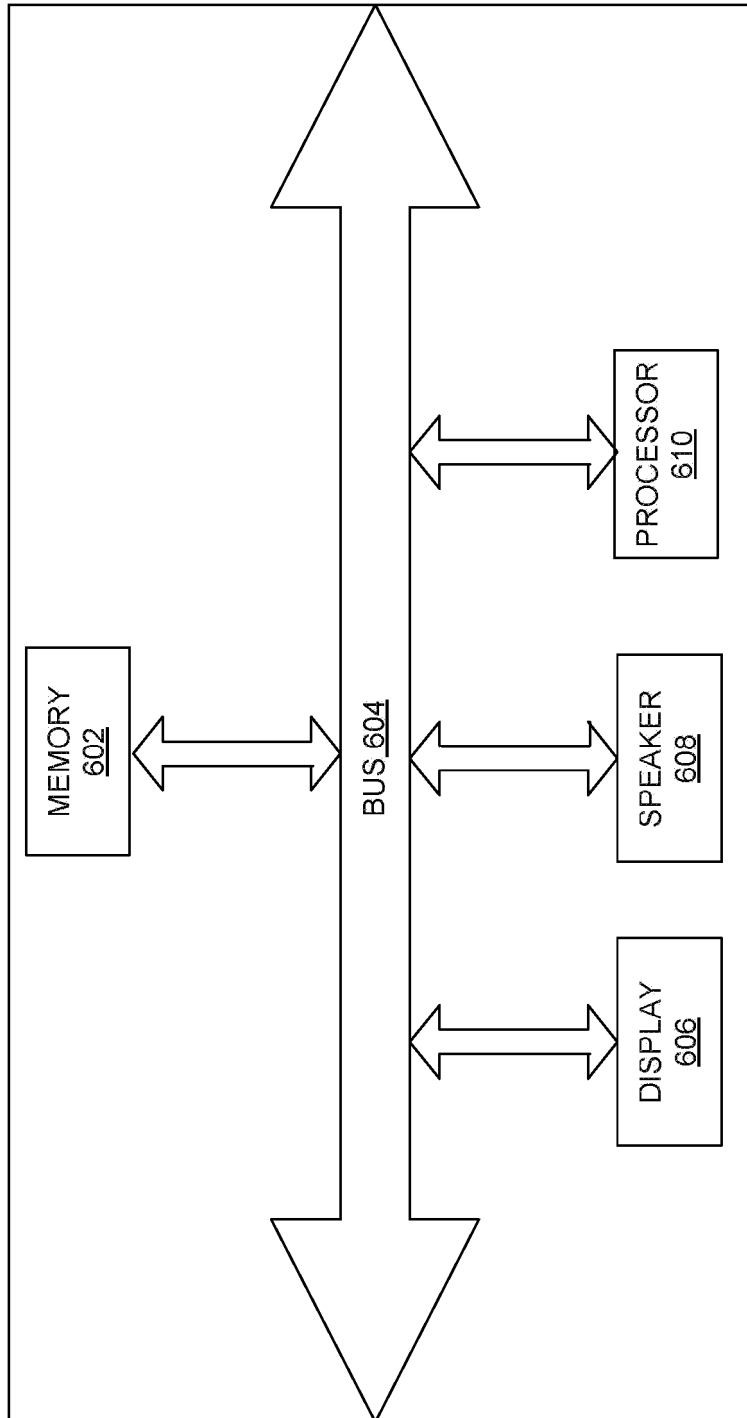


FIG. 5A



**FIG. 5B**



**FIG. 6**

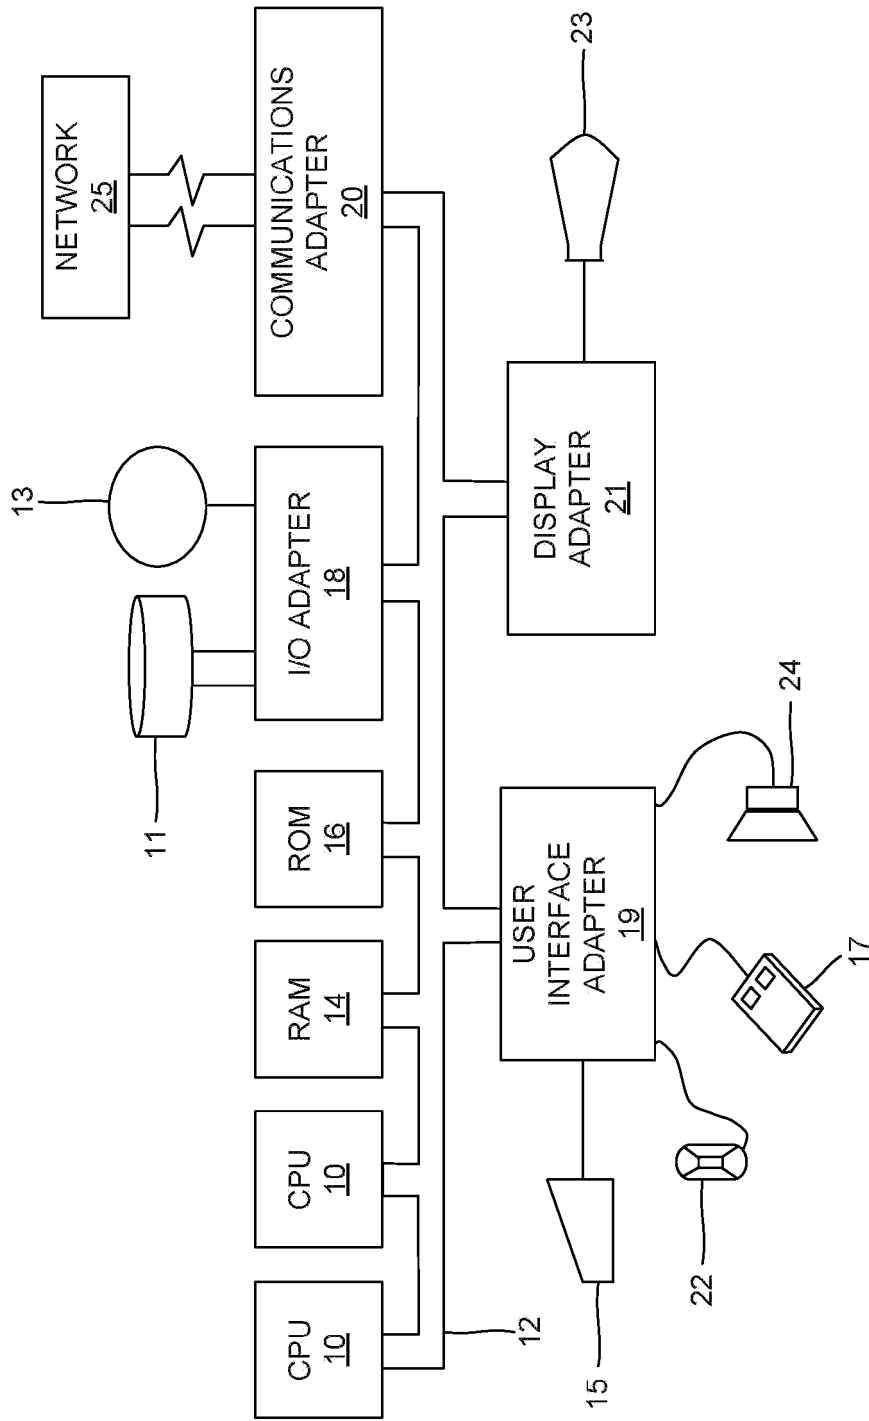


FIG. 7

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- WO 2007032025 A2 [0003]
- EP 1482329 A1 [0004]
- WO 2014005804 A1 [0006]
- US 8150105 B2 [0008]
- US 20040199785 A1 [0010]
- US 7349007 B2 [0011]

**Non-patent literature cited in the description**

- 3D Imaging for Safety and Security. SAFER (Security Automation and Future Electromotive Robotics), 2007, 249-278 [0007]
- **KAREL KOSNAR et al.** *Kerberos-3D undercarriage inspection system* [0009]